Application Bulletin

Airswept – Single Compartment

Microphone Location:

The Microphone should be located about 1/3 of the distance from the feed end of the mill.

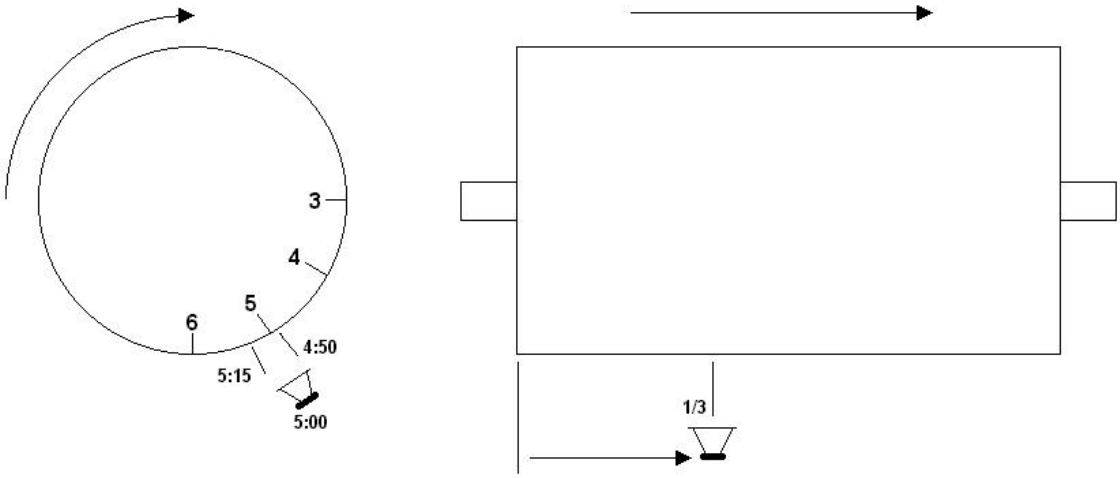

Note: These are the most likely locations from which to start. The mounting stands should allow for complete flexibility per drawing 10A758.

Equipment Required:	MillMinder ASC-2 Single Channel One Millphone Microphones
Optional Equipment:	Nema 4 Steel Enclosure Nema 4 Stainless Steel Enclosure