Application Bulletin

Center Discharge, Airswept – Dual Compartment

Microphone Location:

The Microphone on the feed end should be mounted approximately 1/3 to 1/2 distance from the feed end of the primary grinding compartment. the microphone on the secondary grinding compartment should be located about the center of that compartment.

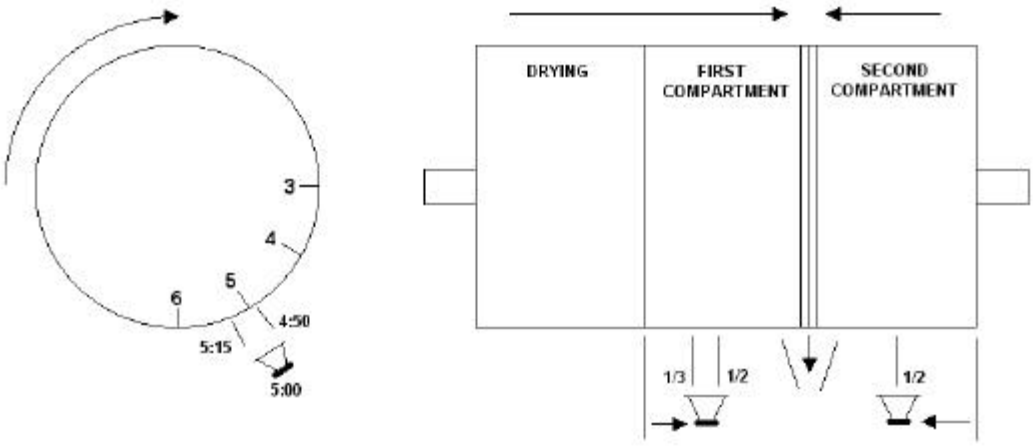

Note: These are the most likely locations from which to start. The mounting stands should allow for complete flexibility per drawing 10A758.

Equipment Required:	MillMinder ASC-2 Two Channel Two Millphone Microphones
Optional Equipment:	Nema 4 Steel Enclosure Nema 4 Stainless Steel Enclosure